





WARNING

CAUTION

NOTICE

---





	.....	5
1.1	.....	5
1.2	.....	6
1.3	.....	

 CW-PPC300

MCU



ISO

GMP

59

59

2000

USB

1.1



## 1.2

- ✚ 0.3um 0.5um 0.7um 1.0um 2.0um 2.5um 5.0um
- ✚ 10um
- ✚ 2,000,000 5%
- ✚ 2.83 /min 0.1ft3
- ✚ 50...5%@0.3μm; 100...10%@0.5μm
- ✚ JJF1190-2008, ASTM-F649-01, ASTM-F328-98 NIST
- ✚ 1 59 59
- ✚ 1 99
- ✚ FED STD 209E 100~1,000,000 ISO 14644-1 5~9
- ✚ / /
- ✚
- ✚ USB
- ✚ 115200bps
- ✚ Li-ion 7.4V/2800mAh AC AC
- ✚ 100~220V DC 9V 1.5A
- ✚ 4
- ✚ 180 W <sup>2</sup> 120 H <sup>2</sup> 211.5 D mm
- ✚ 3500g
- ✚ 5~45 90%RH -20~50 , 90%RH
- ✚ U
- ✚ USB












## 2.3.

### 2.3.1

/English

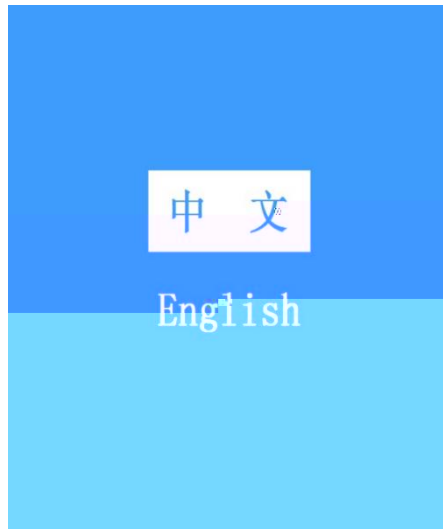

4 /English



5



25%


50%

75%

100%

10

### 2.3.2

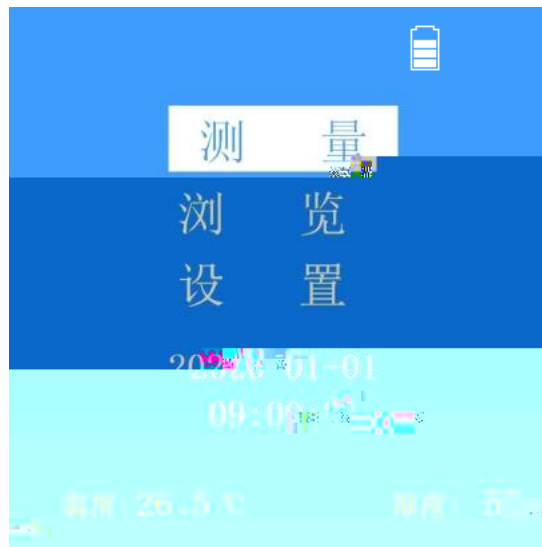

5





" RUN"




/ / / /

2.3.4



" " " "

/ /

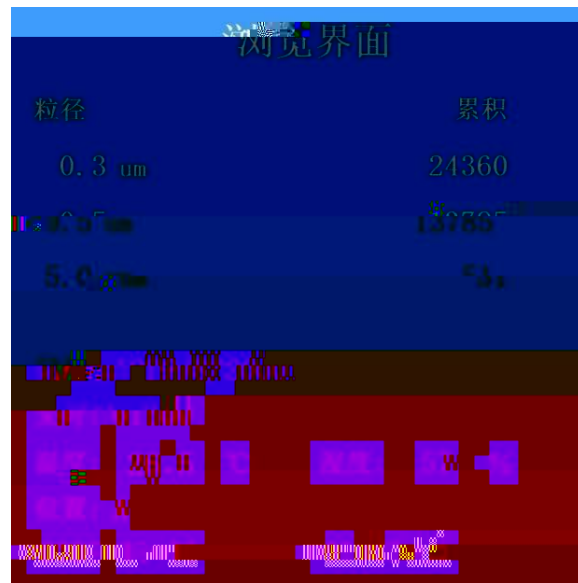

7



/



/ /


/ /

“ BACK”

“ ”

“ ”

“ ENTER”

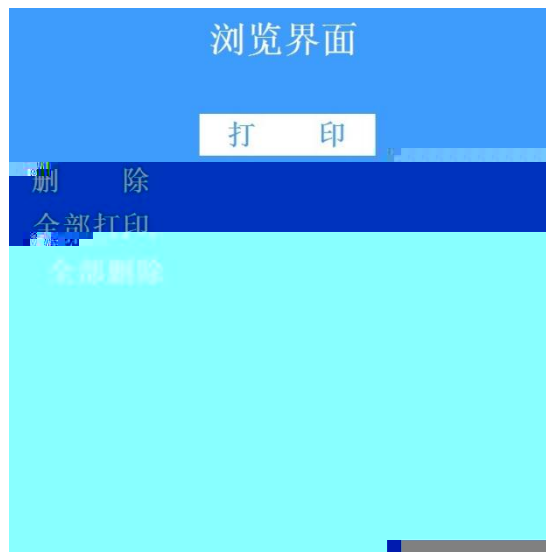

8

1

“ ”

“ ”

“ BACK”

“ ENTER”









5s

15s

30s

60s



/



" ENTER"



11

1



" " " "



" BACK"



" ENTER"

" ENTER"





2000



1 USB



3.1

3.1.1 AC/DC AC 100~220V DC 9V/1.5A  
DC Li-ion

3.1.2 USB USB



Li-ion

①




1mi n,

1mi n



14

1

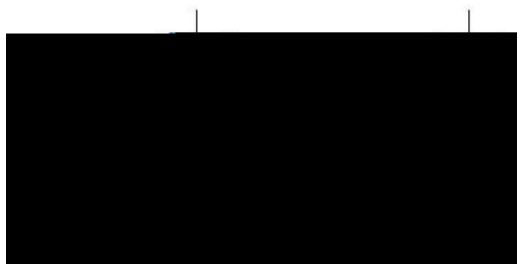

15

2

①



&



• 6,3+ é ? Ö

Tel: 0755 83173768 18923899256